


SYLINTERI LUKKOVENTTIILEILLÄ

Cylinder with load control valves

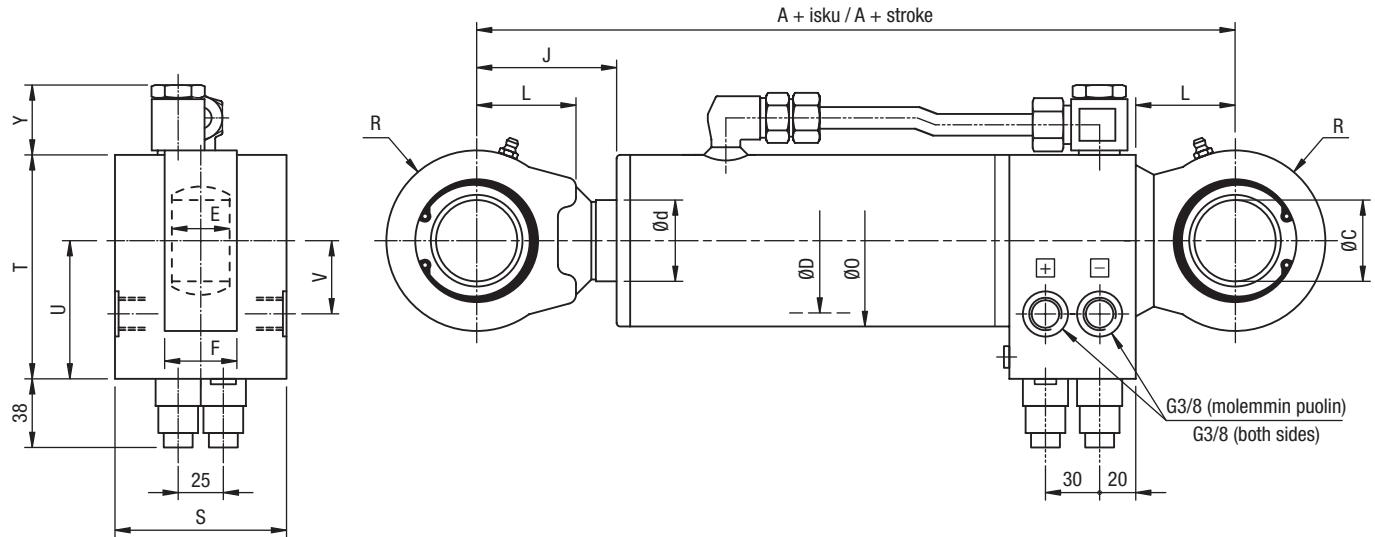


Koodit/Codes:

HD 2205 PP 63/36 - xxx - 24096
 HD 2205 PP 80/45 - xxx - 23434
 HD 2205 PP 100/56 - xxx - 24587
 HD 2205 PP 125/70 - xxx - 23422
 (xxx=isku/stroke)

Mitat / Dimensions

D	63	80	100	125
d	36	45	56	70
A	280	320	370	410
C	35	45	60	70
E	25	32	44	49
F	30	40	50	60
J	62	77	105	113
L	50	55	70	85
O	75	95	115	145
R	40	50	65	75
S	90	95	115	145
T	98,5	124	144	179
U	56	76,5	86,5	106,5
V	20	40,5	50,5	70,5
Y max	40	40	40	55
Painot per 100 mm iskua/stroke (kg)	9,4	13,8	24,5	40,5
Weights per 100 mm iskua/stroke (kg)	1,8	2,9	3,9	6,3
Männän nopeus maksimivirtauksella (m/s) Piston velocity with maximum flow (m/s)	0,32	0,20	0,13	0,08



Nimellispaine/Nominal pressure 21 MPa
 Patruuna/Cartridge Sun Hydraulics CBCA-LHN
 Maksimivirtaus/Maximum flow 60 l/min

HYDORING

www.hydoring.com